



V50

VENTILATING AIR TREATMENT UNIT




A system without compromises

UVpro V50 ventilating air treatment units are ideal for subsequent installation and reliable treatment in laboratories, doctor's offices and small production or storage rooms up to 50 m³. Suitable for wall- and ceiling installation. With power button.

Easy installation, also subsequently

For laboratories, surgeries and small production facilities

Excellent price-performance ratio

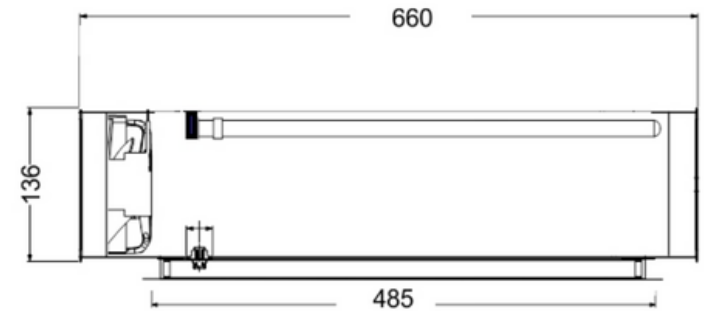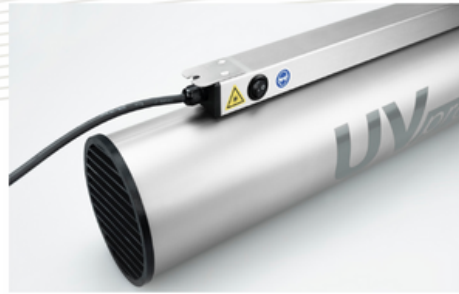

SPECIFICATIONS

Type	UVpro V50
In conformity with requirements	EMC, CE, IP54
Material	stainless steel: WN 1.4301 and WN 1.4305
Operating temperature [°C]	-10 to +40
Input power [W]	35
Current flow [mA]	220
Suitable UVpro lamp	UVpro KTS 20-4bl
Total UVC output [$W_{253,7\text{ nm}}$]	8
Air volume [m^3/h]	50
Noise emission [dB]	51
Mount	Wall and ceiling mounting
Size (L x Ø) [mm]	670 x 136 x 166
Weight [kg]	4
Lamp replacement interval [h]	12,000 (75 % ⁺⁵ % output performance)
Life expectancy electronics	> 10 years
Supply voltage [V_{AC}]	220-240 (50-60 Hz)
Power cable length [m]	5 (length customisable)

Application Optimised UV for



Food & Beverage
Industrial UV



Healthcare
Industrial UV



Pharmaceuticals
Industrial UV



Bioclimatic B.V.
The Netherlands

+31 252 626962
info@bioclimatic.nl
www.bioclimatic.nl